




# FLEXISPOT

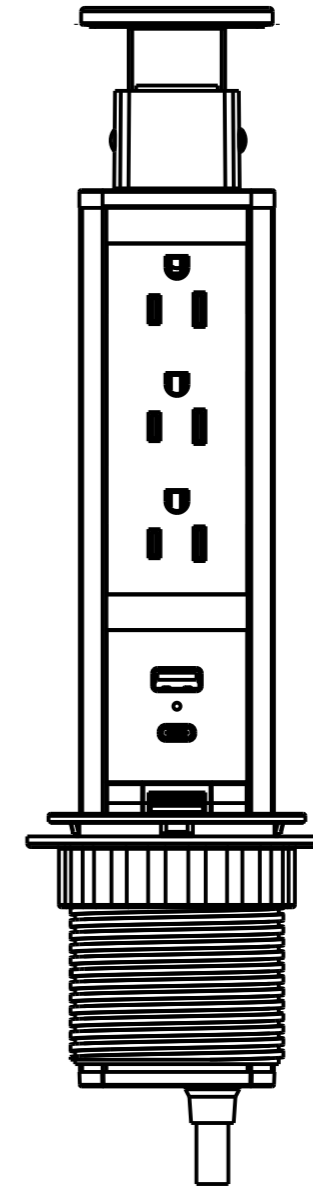

## TECHNICAL PARAMETER

Rate current	15A	
Rate voltage	125V	
Max power	1875W	
Provision for earthing	With earthing contact	
Number of poles	3P+ 	
Enclosure	Aluminium	
Optional Function	Protection	Overcurrent/overcurrent with rock switch
	USB charger	Class 3 power unit, O/P 5Vdc, total 2.4A
Construction	With pop-up handle	





## APPLICATION FIELD

Scalable technology especially recommended in the following application:

- Office
- Conference room
- Salon
- Media room
- Etc...

With the elegant and adjustable design, it makes the socket adapt to the overall environment, provides a simple solution and electrical connection in the original requirements.
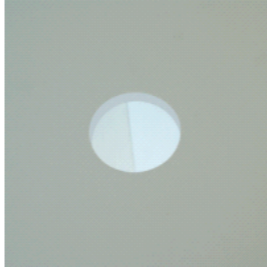
## TECHNICAL PARAMETER

	Drill holes 60 mm in diameter or simply use the existing holes in most of the work desk		Twisting to the left
	Place socket, pay attention to the cord		Screw on the fixing ring

## USE



- With pop-up handle

① Push the button

## CLOSE



Press locking button, push down.